# Model S1200-BF-PR60

*Barrier Free, Horizontally Mounted*
*Emergency Shower, Plastic Showerhead*

## SPECIFICATIONS:

Model S1200-BF-PR60 is a barrier free, horizontally mounted emergency shower with a plastic showerhead, and a 1" stay-open ball valve with a 60” pull rod.

❑ **Model:** S1200-BF-PR60



## STANDARD EQUIPMENT:

**Showerhead**: Yellow, ABS plastic 7-3/8" diameter showerhead with a 20 gpm flow regulator. An anti-microbial agent is molded into the ABS material, providing integrated protection.

**Valve:** 1" NPT rough chrome plated brass stay-open ball valve. Unit is provided with a stainless steel actuator arm and a 60" stainless steel pull rod.

**Water Supply:** 1" NPT female threaded brass inlet.

**Piping**: Schedule 40, 1" galvanized steel pipe, yellow powder coated finish.

**Universal Sign:** ANSI compliant, vertical identification sign.

**Weekly Test Tag:** A water proof test card to record the date and inspector's name for weekly functional testing of the unit.

## OPTIONAL ACCESSORIES:

*Additional costs may be incurred*

| | |
|---|---|
| ❑ -AL2 | Electric alarm with flashing light and horn |
| ❑ -ET71-2-BVS-OTG | Thermostatic mixing valve is ASSE Listed per the ASSE 1071 standard. The tepid output water complies with ANSI Z358.1 standard. Valve includes Ball Valve Shut-offs, Outlet Temperature Gauge |
| ❑ -FLW1 | Flow switch, single pole |
| ❑ -MC1 | Modesty curtain for horizontal showers |
| ❑ -MS1 | MAP (magnetically actuated proximity) switch, for one (1) actuator |
| ❑ -SV1 | 1" stainless steel ball valve |

*Member of U.S. Green Building Council*

*Recyclable Product*

*Acorn Safety assumes no responsibility for use of void or suspended data. © Copyright 2010 Acorn Safety, City of Industry, CA, A Division of Acorn Engineering Company. Please visit **www.acornsafety.com** for most current specifications.*

Submittal # **S1200-BF-PR60**
[SHR] Rev. Date: 07/24/17

**Product carries the following certifications:**

*Test rating conditions are compliant to ANSI Z358.1*


*Member of Acorn Family of Companies*

ACORN SAFETY
15125 Proctor Avenue
City of Industry, CA
91746 U.S.A.
Phone 800-591-9372
626-855-4804
Fax 626-937-4213
www.acornsafety.com

# TECHNICAL DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Safety assumes no responsibility for use of void or suspended data. Dimensions may change with the addition of optional accessories. © 2008 Acorn Safety, a Division of Acorn Engineering Company. Please visit ***www.acornsafety.com*** for most current specifications.

❑ **Model S1200-BF-PR60 :** *Barrier Free, Horizontally Mounted Emergency Shower, Plastic Showerhead*

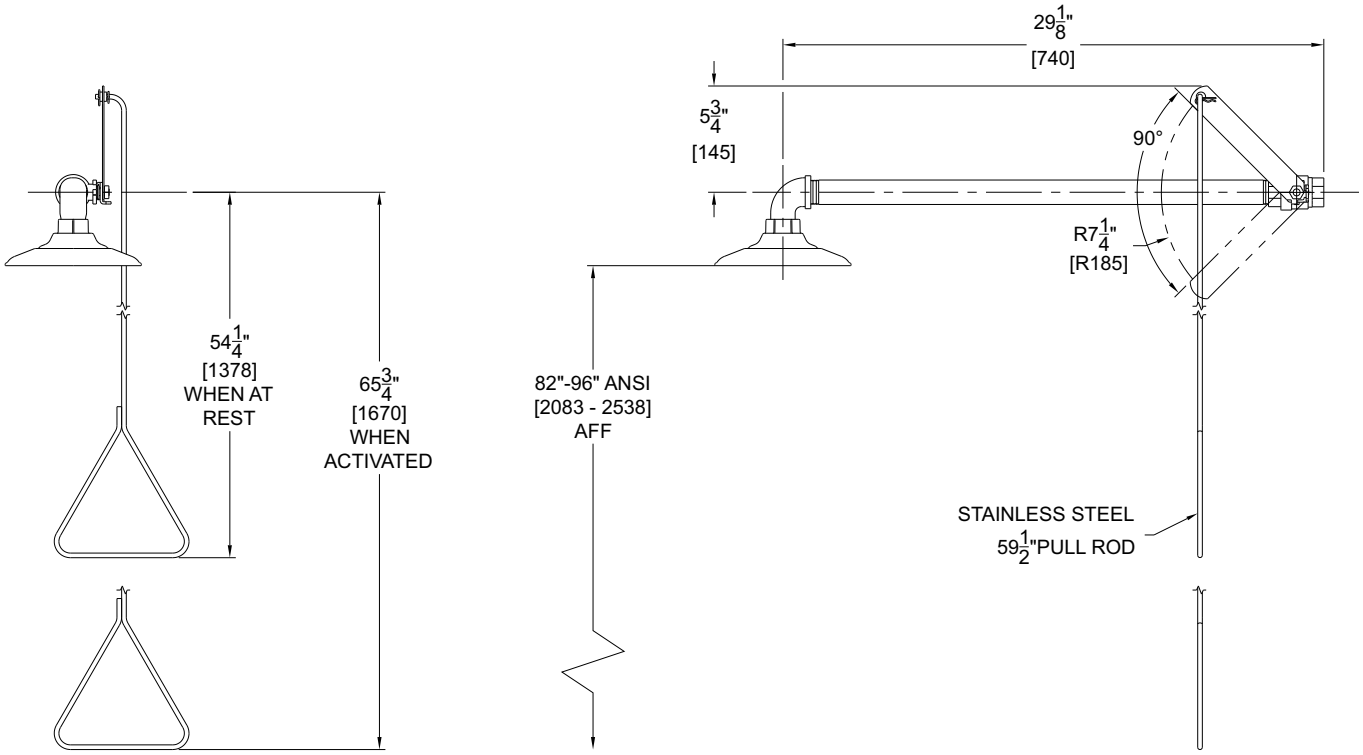


GENERAL NOTES:
1. ALL DIMENSIONS ARE INCHES [MM].
*2. ANSI Z358-1 REQUIRES THE SHOWER HEAD TO BE MOUNTED BETWEEN MINIMUM 82" [2083] TO MAXIMUM 96" [2438] ABOVE THE FLOOR.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Rough-in # **S1200-BF-PR60** Date: 07/24/17

*Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.*

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options_____ Quantity_____

Company_____

Contact_____ Title_____

Signature (Approval for Manufacturing)_____ Date _____

ACORN SAFETY
**800-591-9372**
or 626-855-4804
**www.acornsafety.com**