Model S2200-BF-PR60

Barrier Free, Horizontally Mounted
Emergency Shower, Stainless Steel Showerhead

SPECIFICATIONS:

Model S2200-BF-PR60 is a barrier free, horizontally mounted emergency shower with a stainless steel showerhead and a 1" stay-open ball valve with a 60”pull rod.

❑ **Model:** S2200-BF-PR60



STANDARD EQUIPMENT:

Showerhead: Stainless steel, 8" diameter showerhead with a 20 gpm flow regulator.

Valve: 1" rough chrome plated brass stay-open ball valve. Unit is provided with a stainless steel actuator arm and a 60" stainless steel pull rod.

Water Supply: 1" NPT female threaded brass inlet.

Piping: Schedule 40, 1" galvanized steel pipe, yellow powder coated finish.

Universal Sign: ANSI compliant, vertical identification sign.

Weekly Test Tag: A waterproof test card to record the date and inspector's name for weekly functional testing of the unit.

OPTIONAL ACCESSORIES:

Additional costs may be incurred

❑ -AL2	Electric alarm with flashing light and horn
❑ -AS	All stainless steel
❑ -ET71-2-BVS-OTG	Thermostatic mixing valve is ASSE Listed per the ASSE 1071 standard. The tepid output water complies with ANSI Z358.1 standard. Valve includes Ball Valve Shut-offs, Outlet Temperature Gauge
❑ -FLW1	Flow switch, single pole
❑ -MC1	Modesty curtain for horizontal showers
❑ -MS1	MAP (magnetically actuated proximity) switch, for one (1) actuator
❑ -PCP	Polished chrome plated pipe
❑ -SV1	1" stainless steel ball valve

Member of U.S. Green Building Council

Recyclable Product

*Acorn Safety assumes no responsibility for use of void or superseded data. © Copyright Acorn Safety®, City of Industry, CA, Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit **www.acorneng.com** for most current specifications.*

Submittal # **S2200-BF-PR60**
[SHR] Date: 07/24/17

Product carries the following certifications:

Test rating conditions are compliant to ANSI Z358.1


Division of Acorn Engineering Company®, Member of Morris Group International™

ACORN SAFETY
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Phone 800-591-9372
626-855-4804
www.acorneng.com

TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, *Member of Morris Group International™*. *Please visit **www.acorneng.com** for most current specifications.*

❑ **Model S2200-BF-PR60 :** *Barrier Free, Horizontally Mounted Emergency Shower, Stainless Steel Showerhead*

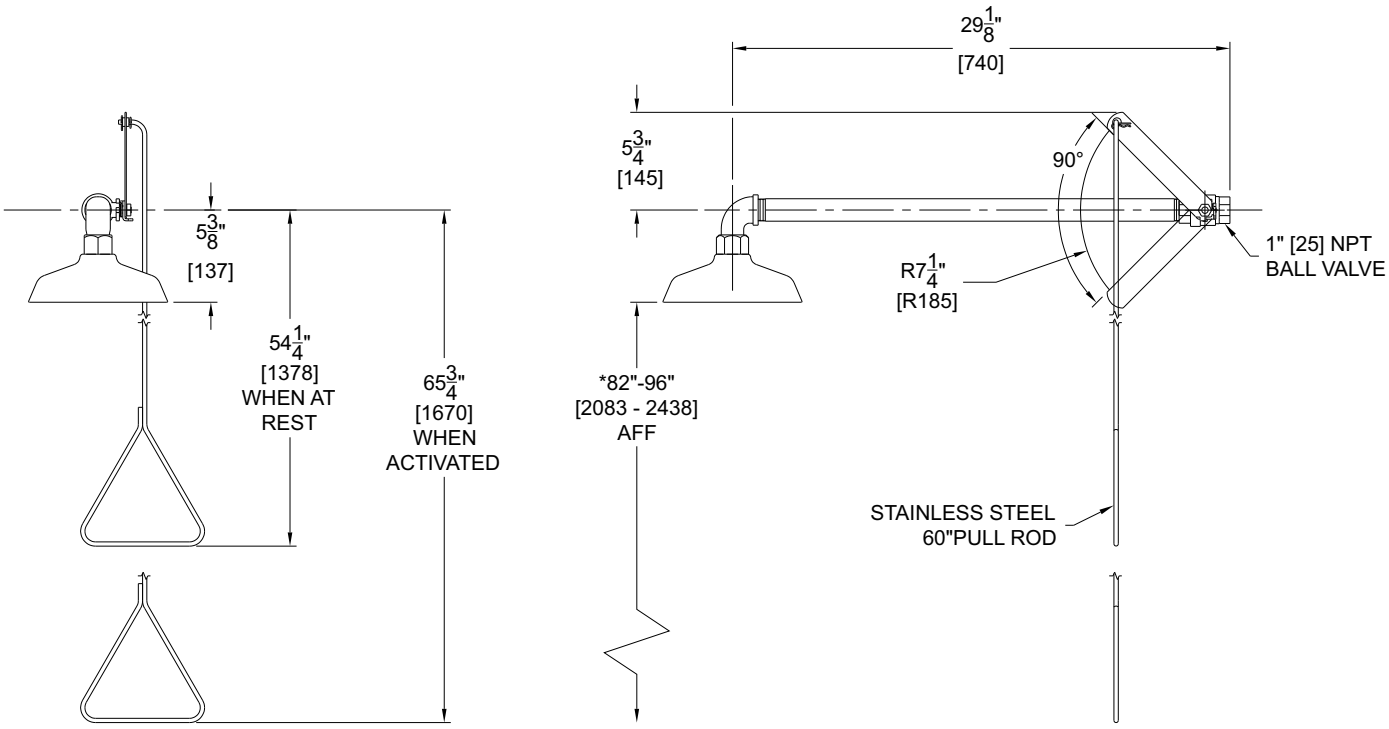

GENERAL NOTES:
1. ALL DIMENSIONS ARE INCHES [MM].
*2. ANSI Z358.1 REQUIRES THE SHOWER HEAD TO BE MOUNTED BETWEEN 82" - 96" [2083 - 2438] ABOVE THE FLOOR.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options_____ Quantity_____

Company_____

Contact_____ Title_____

Signature (Approval for Manufacturing)_____ Date _____

ACORN SAFETY®
800-591-9372
or 626-855-4804
www.acorneng.com